

Model 575

Submersible Level Transmitter



Description

The Model 575 has a removable, nonclogging snub nose end to protect the sensing elements. The Model 575 is used in general water/wastewater applications.

The unit is specially designed to provide the convenience of direct submergence in many types of liquid, especially wastewater, for quick, accurate and reliable level measurement. The simple design and rugged construction of these solid state instruments provide long lasting service with virtually no maintenance.

The 575 Series Transmitters indicate the level of liquid by continuously measuring hydrostatic pressure via its

sensing element, an ion implanted silicon semiconductor chip with integral Wheatstone Bridge circuit. Once the sensor measures the pressure, the data is transmitted by a 4 to 20 mA output signal. This design provides for excellent linearity and repeatability, low hysteresis and long-term stability.

The transmitter is easy to install. Simply lower the transmitter into a tank. All the electronics are mounted in a submersible 316 stainless steel housing. A special cable support bracket is also available. This gives extra stability to the transmitter when used with longer lengths of cable or when used in an agitated liquid.*

The transmitter is available calibrated for any span needed, from 0 to 3 psi or 0 to 0.2 bar (0 to 7 feet or 0 to 2.1 meters of water) to 0 to 300 psi or 0 to 20 bar (0 to 690 feet or 0 to 211 meters of water).

To complete your liquid level measurement and control system, use the AMETEK Model DMC Digital Meter/Controller with the 575 Series Transmitters.

* A conduit adapter is also available.

Features

- CSA approved for intrinsically safe operation
- Solid state semiconductor sensor for accuracy and reliability
- Rugged 316 stainless steel housing with excellent environmental protection
- Easy to install and use
- 2 wire 4 to 20 mA output
- Vented to the atmosphere through the surface end of the cable
- Reverse polarity and surge protected
- Lightning protectors available
- EMI protection available

Model 575S Submersible Level Transmitters


Applications

- Tanks
- Water/wastewater treatment
- Ponds
- Lift stations
- Water wells
- Slurry/sludge
- Pump control
- Level control

Specifications

- **Feet of Water:** 0/14, 0/35, 0/69, 0/138, 0/230, 0/345, 0/460, 0/690
- **Meters of Water:** 0/4, 0/10, 0/21, 0/42, 0/70, 0/105, 0/140, 0/210
- **Bar:** 0/0.4, 0/1, 0/2, 0/4, 0/7, 0/10, 0/14, 0/20
- **PSI:** 0/6, 0/15, 0/30, 0/60, 0/100, 0/150, 0/200, 0/300
- **Output:** 4 to 20 mA, 2 wire, current limited to 30 mA DC
- **Power Supply:** 12 to 40 VDC with reverse polarity surge protection; Limited to 28 VDC for CSA I.S.
- **Loop Resistance:** 1400 ohms maximum at 40 volts
- **Temperature Range**:**
 - Ambient Operating: CSA intrinsically safe T3C = -25° to 180°F (-32° to 82°C)
 - Storage: -40° to 180°F (-40° to 82°C)
 - **If submerged in a liquid that has frozen, damage will result. Limit high temperature to 140°F (60°C) for intrinsically safe operation.
- **Overrange Effect:** ±0.15% full scale at 200% of maximum range
- **Overrange Limit:** 200% of maximum range
- **Accuracy:** ±0.25% full scale, BFS (including linearity, hysteresis and repeatability); ±0.50% full scale (6 psi range only)
- **Zero Offset:** ±0.50% full scale set at 77°F (25°C)
- **Span:** ±0.50% full scale set at 77°F (25°C)
- **Temperature Effects: (15 psi and above)**
- **Compensated:** 23° to 130°F (-5°C to 55°C); Maximum ±1% URL output change for ±25°C temperature change within compensated range when calibrated at 25°C. Consult factory for lower or alternate pressure ranges.
- **Power Supply Effect:** ±0.005% full scale per volt
- **Construction:**
 - Diaphragm: 316L stainless steel

Dimensions

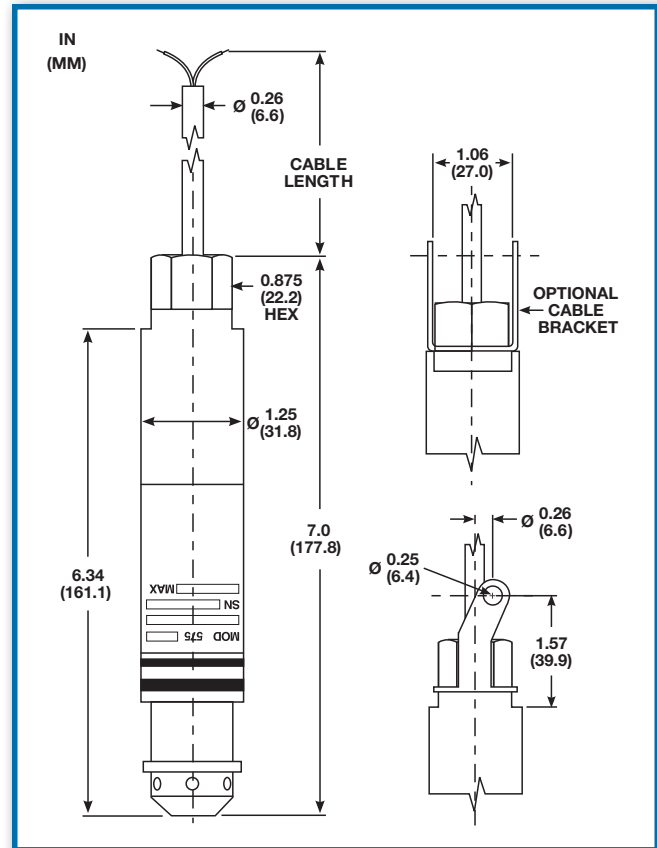

Housing Type: 316 stainless steel

Nut/Washer Type: 316 stainless steel

Cable Grommet: Viton standard.

Please contact factory for other options.

Housing O Ring: Viton standard.

Please contact factory for other options.


Cable Jacket: Polyurethane

- **Media Compatibility:** Reference materials of construction
- **Electrical Connection:** Attached 20 gauge polyurethane shielded cable. Unspliced lengths available up to 5000 ft. (1662 m)
- **Weight:** 1.0 lb. (454 g)
- **Approvals:** Meets CSA requirements for intrinsically safe operation in hazardous locations as designated by Class I, Div 1, Groups A, B, C & D and Class II, Groups E, F & G. Temperature Code T3C (when used with approved barrier).
- **Snub Nose:** Nylon 6/6, removable (1/2 inch NPT)
- **Option:** SJB-100 junction box with desiccant; DMC Meter Controller and Housing

Tel: 215-355-6900

www.ametekpmt.com

Model Numbering:

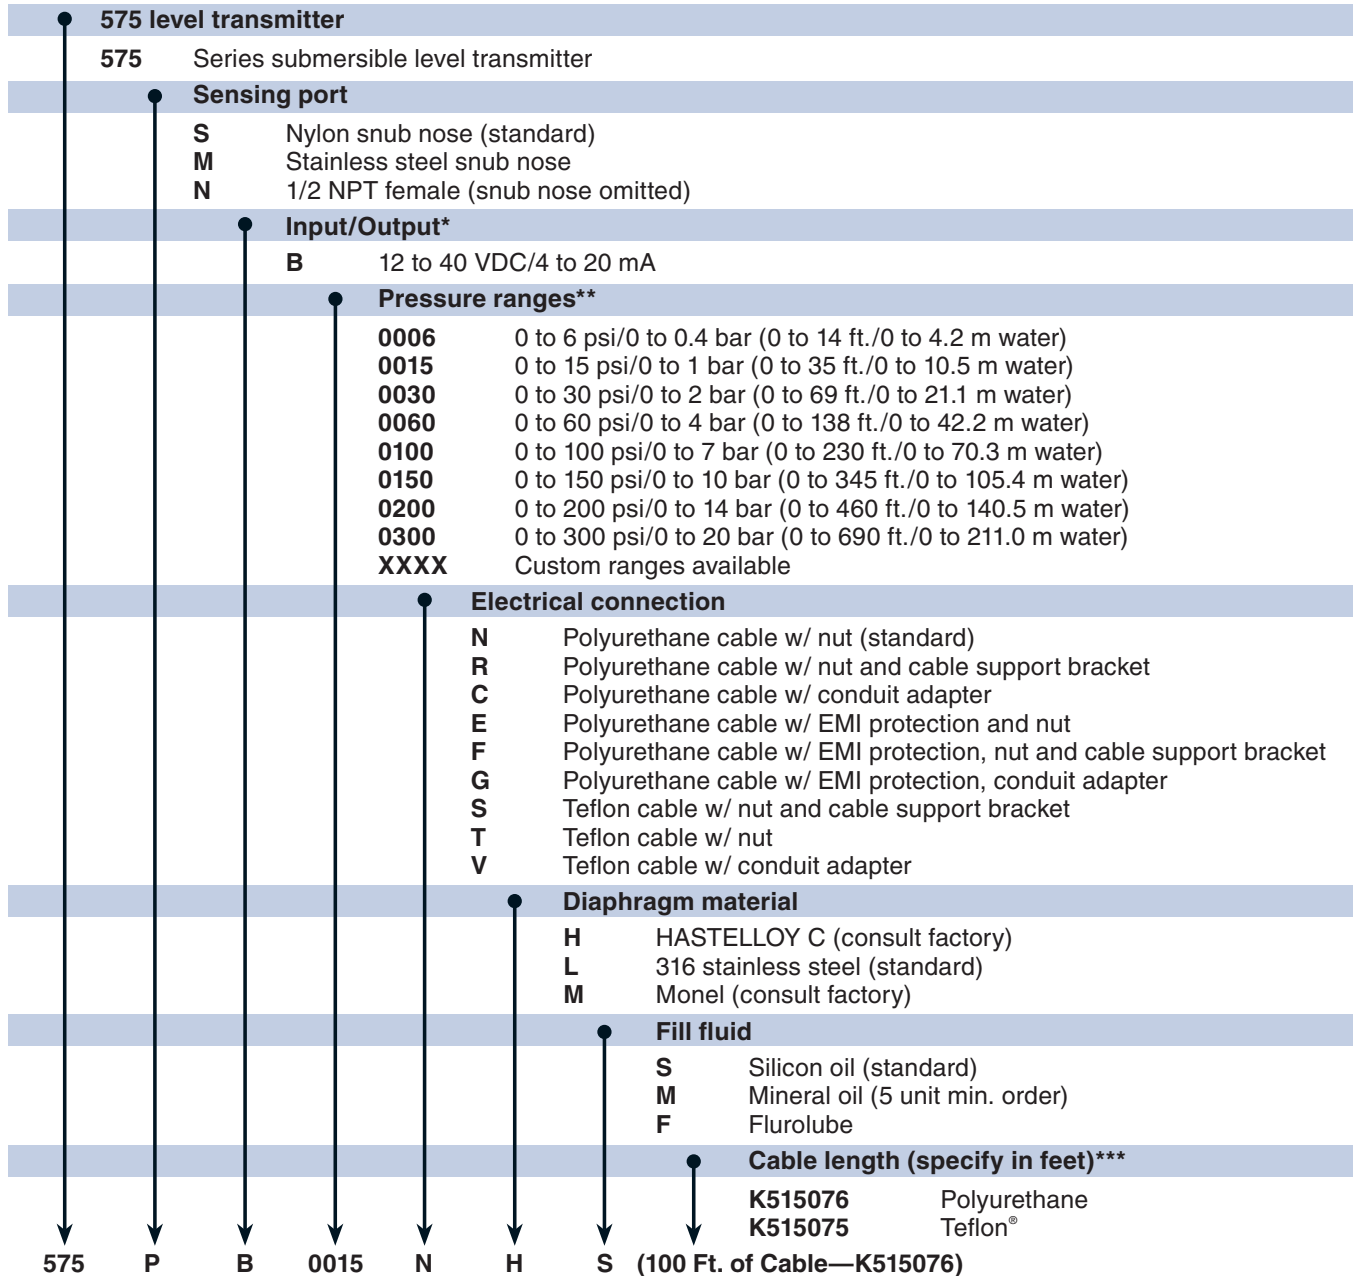

* Please contact the factory for availability of different input/output options.

** Calibrated ranges can be specified after the model code; the specific range should be between the upper and lower ranges in the category selected.

*** Note: Unspliced lengths available up to 5000 ft. (1662m). Please contact factory for other options.

Model 575 Series Submersible Level Transmitters



820 Pennsylvania Boulevard • Feasterville, PA 19053 • U.S.A.
Tel: 215-355-6900 • Fax: 215-354-1802 • www.ametekpmt.com

© AMETEK, Inc. All rights reserved • Printed in the U.S.A. • PDF808 (110087) K796422