

## The Point™ Line Powered RF Series Point Level Switch



### One of the Drexelbrook RF Point Level Switches You Won't Have to Calibrate

Simply install ThePoint Series into the tank and apply power...that's it! Unlike other RF or capacitance systems that require calibration via setpoint potentiometers, jumpers, magnets, or pushbuttons, ThePoint Series reliably detects the absence or presence of material without any adjustments.

ThePoint Series software continuously monitors the application for changes in composition, dielectric or conductivity. Other RF and capacitance systems require calibration adjustments when the process material is changed. Since ThePoint Series recognizes changes in material, it is ideal for non-dedicated tanks that are used for a wide variety of products.

### Intelligent Electronics Save Time and Money

- UNIQUE! - NO calibration or setpoint adjustments, for most applications.
- UNIQUE! - Ignores changes in dielectric or conductivity.
- Automatically recognizes and ignores coatings to prevent false alarms.
- Universal power supply automatically detects & adjusts to input power source.

### Diverse Applications

- Detects the absence or presence of liquids, slurries, and granulars.
- Capable of high pressures and temperatures.

### Economical Without Sacrifice

- Retains superior performance.
- Less maintenance than other technologies; no moving parts to hang up or wear out.

### Output

- DPDT relay dry contacts at 5A, 120VAC.

### Remote or Integral Electronics

- Unlike many technologies, electronics can be remote mounted to a convenient or safe location

### Lower Cost of Ownership

In addition to lower initial investment, ThePoint continues to save with little or no maintenance compared with other technologies. Further, the sensor can be lengthened or shortened in the field, saving need for additional purchases.

### Universal Power Supply

ThePoint electronics use a universal power supply module that can be powered from a 19 to 250 Vac or 18 to 200 Vdc supply without moving jumpers.

Point Level Measurement



# Point Level Measurement

## The Point™

### Specifications

**Technology:**

RF Admittance.

**Calibration:**

None (for most applications).

**Modes Of Operation:**

High and Low Level.

**Repeatability:**

2 mm (0.08 inch) conductive liquids.

**Response Time:**

Less than one second.

**Ambient Electronic Temperature:**

-40 to 70°C (-40 to 158°F) FM, FMc

**Storage Temperature:**

-40 to 85°C (-40 to 185°F).

**Indicators:**

LEDs: Green Power, Red Relay 1.

**Time Delay:**

0-60 seconds, forward or reverse-acting.

**Supply Voltage:**

19-250 VAC

18-200 VDC

Auto-detecting without jumpers.

**Power Consumption:**

2 watts maximum.

**Relay Contacts:**

DPDT dry contacts at 5A, 120Vac.

**Maximum Contact Load:**

5A/30 VDC

5A/250 VAC **Maximum Switching Capacity:**

2000 VA/150 Watt.

**Minimum Contact Load (DC):**

100 mA/12 VDC

0 -200 mA / 12 VDC (Optional)

**Housing:**

Powder-Coated aluminum with two cable entries.

**Cable Entry:**

M20 x 1.5

¾-inch NPT

**Ingress Protection:**

IP66 NEMA 4X

**Approvals:****Remote**

Explosion-proof for Class I, Division 1, Groups A, B, C, and D; Dust-Ignition proof for Class II, III, Division 1, Groups E, F, and G; Non-incendiary for Class I, Division 2, Groups A, B, C, & D; Suitable for Class II, III, Division 2, Groups F & G hazardous outdoor Type 4, 4X, IP66 (classified) locations with Intrinsically Safe connections to Class I, II, III, Division 1, Groups A, B, C, D, E, F, and G hazardous (classified) locations in accordance with Control Drawing 420-0004-181-CD.

**Integral:**

[Same, but Group A does not apply.]




II 1/2 G EEx d[ia] IIC T2..T5, Ta = -30°C to +70°C  
II 1/2 D T 90°C

**IECEX (For Remote Electronics)**


Electronics Ex d[ia] Gb IIC T5; -30°C ≤ Ta ≤ +70°C

Sensing Element Ex ia Ga IIC T2... T5; -30°C ≤ Tamb ≤ +70°C

### Wiring

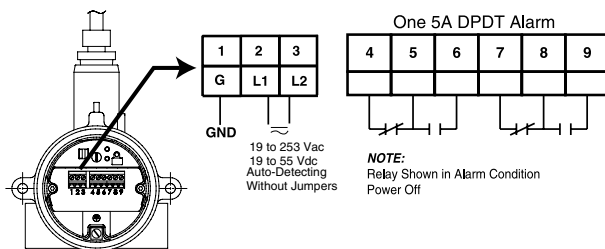

### Dimensions

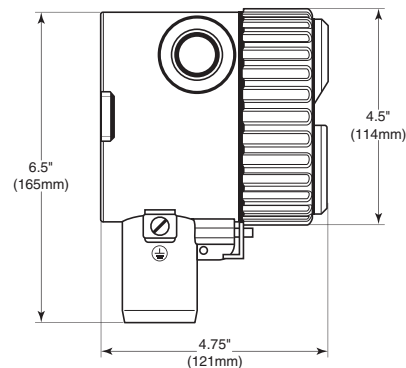

# Point Level Measurement

## The Point™

### Model Numbering (continued on next page)

<b>Technology</b>					
<b>P</b>	RF Admittance				
<b>Measurement Type</b>					
<b>N</b>	Std Auto Cal	<b>H</b>	Hi Sense .5 pF Auto Cal	<i>NOTE: All Calibration modes are built into the standard unit. Modes can be changed in the field as required (See Instruction Manual)</i>	
<b>L</b>	Std 2 pF Fixed	<b>P</b>	Hi Sense .5 pF Fixed		
<b>T</b>	10 pF Auto Cal	<b>G</b>	Hi Sense Manual		
<b>V</b>	10 pF Fixed	<b>M</b>	Std Sense Manual		
<b>Input</b>					
<b>L</b>	Universal Power Supply 19-250 VAC, 18-200 VDC				
<b>Output</b>					
<b>1</b>	One DPDT Relay, dry contacts, 5A, 120VAC (Min 100 mA / 12 VDC)				
<b>2</b>	One DPDT Relay, gold plated contacts (Max 200 mA / 12 VDC)				
<b>Housing</b>					
<b>0</b>	No Approvals(Remote), NEMA 4X/IP66, M20 X 1.5 conduit entries				
<b>1</b>	No Approvals, NEMA 4X/IP66, ¾" conduit entries				
<b>2</b>	ATEX / IECEx (IECEX Remote only), NEMA 4X/IP66, M20 X 1.5 conduit entries				
<b>3</b>	FM / FMc approved, NEMA 4X/IP66, ¾" conduit entries				
<b>5</b>	No Approvals, NEMA 4X/IP66, M20 conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>6</b>	FM / FMc approved (Integral), No Approvals (Remote), NEMA 4X/IP66, ¾" conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>7</b>	FM / FMc approved (Remote), NEMA 4X/IP66, ¾" conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>8</b>	No Approvals (Integral), NEMA 4X/IP66, ¾" conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>9</b>	FM / FMc approved (Integral), No Approvals (Remote), NEMA 4X/IP66, M20 conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>A</b>	No Approvals (Remote), NEMA 4X/IP66, ¾" conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>B</b>	FM / FMc approved (Remote), NEMA 4X/IP66, ¾" conduit entries, Dual Seal, Perm-a-Seal Sensors – only				
<b>Electronics</b>					
<b>0</b>	Integral	<b>7</b>	Rmt. w/ (25 ft.) Tri-Ax Cable	<b>E</b>	Rmt. w/ (75 ft.) 1st 10ft Hi-Temp. Cbl.
<b>1</b>	Remote, no cable	<b>8</b>	Rmt. w/ (50 ft.) Tri-Ax Cable	<b>F</b>	Rmt. w/ (5 ft.) G.P. Cable
<b>2</b>	Rmt. w/ 3 m (10 ft.) G.P. cable	<b>9</b>	Rmt. w/ (75 ft.) Tri-Ax Cable	<b>G</b>	Rmt. w/ (5 ft.) Tri-Ax Cable
<b>3</b>	Rmt. w/ 7.6 m (25 ft.) G.P. cable	<b>A</b>	Rmt. w/ (10 ft.) Hi-Temp. Cable	<b>H</b>	Rmt. w/ (10 ft.) Tri-Ax Cable
<b>4</b>	Rmt. w/ 10.6 m (35 ft.) G.P. cable	<b>B</b>	Rmt. w/ (25 ft.) 1st 10ft Hi-Temp. Cbl.	<b>J</b>	Rmt. w/ (35 ft.) Tri-Ax Cable
<b>5</b>	Rmt. w/ 15.2 m (50 ft.) G.P. cable	<b>C</b>	Rmt. w/ (35 ft.) 1st 10ft Hi-Temp. Cbl.	<b>K</b>	Rmt. w/ (5 ft.) Hi-Temp. Cable
<b>6</b>	Rmt. w/ 23 m (75 ft.) G.P. cable	<b>D</b>	Rmt. w/ (50 ft.) 1st 10ft Hi-Temp. Cbl.		
<b>Sensing Element</b>					
	<b>Application</b>	<b>Sensing Element</b>	<b>Pressure/Temperature</b>	<b>Wetted Parts</b>	
<b>00</b>	General purpose	700-1202-001 remote 700-1202-021 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and PEEK	
<b>01</b>	Floating roof with cable attachment and brass bottom weight	700-1202-012 remote 700-1202-022 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS, Brass, and PEEK	
<b>02</b>	General purpose, longer insertion lengths with cable attachment and 316SS bottom weight	700-1202-014 remote 700-1202-024 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and PEEK	
<b>03</b>	Proximity	700-1202-018 remote 700-1202-028 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and PEEK with 76 mm (3) 316SS proximity plate 316SS and PEEK	
<b>04</b>	General purpose, high temperature and pressure	700-1202-041 remote 700-1202-042 integral	69 bar @ 121°C (1000 PSI @ 250°F) 20.7 bar @ 232°C (300 PSI @ 450°F)		
<b>06</b>	General purpose with FDA approved materials of construction	700-1202-031 remote 700-1202-032 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and FDA grade PEEK	
<b>07</b>	General purpose Granular materials	700-1202-010 remote 700-1202-020 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and PEEK with 7/8 inch dia. 316SS collar	
<b>09</b>	General purpose Granular materials with FDA approved materials of construction	700-1202-033 remote 700-1202-034 integral	13.8 bar @ 232°C (200 PSI @ 450°F)	316SS and FDA grade PEEK with 7/8 inch dia. 316SS collar	
<b>10</b>	Corrosive liquids (2)(4)(9)	700-0001-018 remote	3.4 bar @ 149°C (50 PSI @ 300°F)	PFA	
<b>11</b>	General purpose, TFE compatibility required	700-0201-005 int/rem	69 bar @ 38°C (1000 PSI @ 100°F) 34.5 bar @ 149°C (500psi @ 300°F)	316SS and TFE	
<b>12</b>	Corrosive material, higher pressure	700-0201-005 int/rem Hastelloy C	69 bar @ 38°C (1000 PSI @ 100°F) 34.5 bar @ 149°C (500psi @ 300°F)	Hastelloy C and TFE	
<b>14</b>	General Purpose, low pressure	700-0202-002 int/rem	3.4 bar @ 149°C (50 PSI @ 300°F)	316SS and TFE	
<b>15</b>	Heavy duty, agitated tanks or material with high bulk density (1)	700-0202-043 remote	69 bar @ 38°C (1000 PSI @ 100°F) 34.5 bar @ 149°C (500psi @ 300°F)	316SS and TFE	
<b>16</b>	High Integrity Seal for Hazardous Materials	700-0002-360 int/rem	34.5 bar @ 149°C (500 PSI @ 300°F)	PFA	
<b>18</b>	Corrosive material, higher pressure with waterlike viscosity (4)	700-0001-022 int/rem	69 bar @ 38°C (1000 PSI @ 100°F) 34.5 bar @ 149°C (500 PSI @ 300°F)	TFE	
<b>19</b>	Interface Measurement	700-0002-023 int/rem	69 bar @ 38°C (1000 PSI @ 100°F) 34.5 bar @ 149°C (500 PSI @ 300°F)	316SS and TFE	
<b>20</b>	Miniature Pilot Plant Sensor (1)(7)	700-0209-002 remote	6.9 bar @ 121°C (100 PSI @ 250°F) 0 bar @ 232°C (0 PSI @ 450°F)	316 SS and TFE	

(Continued on Next Page)

# Point Level Measurement

## Model Numbering (Continued from Previous Page)

Fly Ash Precipitators, Baghouse, and Economizers (1) (6)					
	Application	Sensing Element	Pressure/Temperature	Wetted Parts	
31	No hopper Installation	700-0029-001 remote	0.1 bar @ 260°C (2 PSI @ 500°F)	316SS and TFE	
32	Hopper Installation up to 200mm (8 inches)	700-0029-002 remote	0.1 bar @ 260°C (2 PSI @ 500°F)	316SS and TFE	
33	Hopper Installation up to 406mm (16 inches)	700-0029-003 remote	0.1 bar @ 260°C (2 PSI @ 500°F)	316SS and TFE	
34	Hopper Installation up to 521mm (20.5 inches)	700-0029-004 remote	0.1 bar @ 260°C (2 PSI @ 500°F)	316SS and TFE	
35	Hopper Installation up to 635mm (25 inches)	700-0029-005 remote	0.1 bar @ 260°C (2 PSI @ 500°F)	316SS and TFE	
Plugged Chute Detection (1) (5)					
	Application	Sensing Element	Pressure/Temperature	Wetted Parts	
50	Flush Mount Sensor 305mm <sup>2</sup> (12 inches <sup>2</sup> ) heavy duty	700-0207-001 remote	0.1 bar @ 82°C (1 PSI @ 180°F)	304 SS and Polyurethane	
51	Flush Mount Sensor 305mm <sup>2</sup> (12 inches <sup>2</sup> ) higher temperature	700-0207-002 remote	0.1 bar @ 149°C (1 PSI @ 300°F)	304 SS and TFE	
52	Flush Mount Sensor 305mm <sup>2</sup> (12 inches <sup>2</sup> ) with curved radius 153, 229, 305 mm (6, 9, or 12 inches)	700-0207-003 remote	0.1 bar @ 82°C (1 PSI @ 180°F)	304 SS and Neoprene	
53	Flush Mount Sensor 305mm <sup>2</sup> (12 inches <sup>2</sup> ) extra heavy duty	700-0207-004 remote	0.1 bar @ 82°C (1 PSI @ 180°F)	410 SS and UHMW Polyethylene	
55	Flush Mount Sensor 203mm <sup>2</sup> (8 inches <sup>2</sup> ) heavy duty	700-0207-006 remote	0.1 bar @ 82°C (1 PSI @ 180°F)	304 SS and Polyurethane	
High Pressure / High Temperature					
60	High Pressure & Temp.	700-0204-038 remote	137.9 bar @ 93°C (2000 PSI @ 200°F) 68.9 bar @ 260°C (1000 PSI @ 500°F)	316SS and Ceramic	
61	High Temperature	700-0204-002 remote	0 bar @ 816°C (0 PSI @ 1500°F)	316SS and Ceramic	
62	High Pressure & Temp.	700-0204-048 remote	275.8 bar @ 316°C (4000 PSI @ 600°F)	316SS	
ZZ	Sensing Element Not Listed				

● Mounting Type (See separate Mounting Chart for first three digits)

	IL	CSL	IL	CSL
xxx1	457 mm (18")	152 mm (6")	xxxG 457 mm (18")	0 mm (0")
xxx2	305 mm (12")	152 mm (6")	xxxH 914 mm (36")	254 mm (10")
xxxA	152 mm (6")	51 mm (2")	xxxJ 914 mm (36")	0 mm (0")
xxxB	305 mm (12")	51 mm (2")	xxxK 1219 mm (48")	254 mm (10")
xxxC	305 mm (12")	89 mm (3.5")	xxxL 1524 mm (60")	254 mm (10")
xxxD	457 mm (18")	51 mm (2")	P00X	IL/CSL Other
xxxE	457 mm (18")	89 mm (3.5")	A1BX	IL/CSL factory set for Fly Ash
xxxF	457 mm (18")	254 mm (10")	xxxZ	Other



Not all mounting options available with all sensing elements

Notes: CSL (Cote-Shield Length) should extend through Nozzle + Typical "Wall Buildup" + 2 Inches

- (1) Available with remote electronics only
- (2) Use A1P mounting option
- (3) Choose only sanitary mounting options
- (4) Available with 0-inch CSL only
- (5) Use P00X mounting option
- (6) Use A1B mounting option
- (7) Use A8B mounting option (1/4-inch NPT)
- (8) Choose from flange mounting only
- (9) FM approved with remote electronics only

### NPT Threads

A1B	3/4"NPT	316SS
A1C	3/4"NPT	Hastelloy C
A1P	3/4"NPT	PFA

A2B	1"NPT	316SS
A2C	1"NPT	Hastelloy C

### Sanitary TriClamps

C2B	1"TriClamp	316SS	C4B	2"TriClamp	316SS
C3B	1 1/2"TriClamp	316SS			

### DIN Flanges

E01	25 mm	16 bar	RF 316/316L SS
EP1	25 mm	40 bar	RF 316/316L SS
EQ1	50 mm	16 bar	RF 316/316L SS
ER1	50 mm	40 bar	RF 316/316L SS
ES1	80 mm	16 bar	RF 316/316L SS
ET1	80 mm	40 bar	RF 316/316L SS
EU1	100 mm	16 bar	RF 316/316L SS
EV1	100 mm	40 bar	RF 316/316L SS
EW1	150 mm	16 bar	RF 316/316L SS
EX1	150 mm	40 bar	RF 316/316L SS

E02	25 mm	16 bar	RF CS
EP2	25 mm	40 bar	RF CS
EQ2	50 mm	16 bar	RF CS
ER2	50 mm	40 bar	RF CS
ES2	80 mm	16 bar	RF CS
ET2	80 mm	40 bar	RF CS
EU2	100 mm	16 bar	RF CS
EV2	100 mm	40 bar	RF CS
EW2	150 mm	16 bar	RF CS
EX2	150 mm	40 bar	RF CS

### ANSI Flanges

DA1	1"	150#	RF 316/316L SS	DA2	1"	150#	RF CS
DB1	1 1/2"	150#	RF 316/316L SS	DB2	1 1/2"	150#	RF CS
DC1	2"	150#	RF 316/316L SS	DC2	2"	150#	RF CS
DD1	2 1/2"	150#	RF 316/316L SS	DD2	2 1/2"	150#	RF CS
DE1	1"	300#	RF 316/316L SS	DE2	1"	300#	RF CS
DF1	1 1/2"	300#	RF 316/316L SS	DF2	1 1/2"	300#	RF CS
DG1	2"	300#	RF 316/316L SS	DG2	2"	300#	RF CS
DH1	2 1/2"	300#	RF 316/316L SS	DH2	2 1/2"	300#	RF CS
DI1	3"	150#	RF 316/316L SS	DI2	3"	150#	RF CS
DJ1	3"	300#	RF 316/316L SS	DJ2	3"	300#	RF CS
DK1	4"	150#	RF 316/316L SS	DK2	4"	150#	RF CS
DL1	4"	300#	RF 316/316L SS	DL2	4"	300#	RF CS
DM1	6"	150#	RF 316/316L SS	DM2	6"	150#	RF CS
DN1	6"	300#	RF 316/316L SS	DN2	6"	300#	RF CS



205 Keith Valley Road, Horsham, PA 19044 U.S.A.

Tel: 215-674-1234 Fax: 215 674-2731

Email: [drexelbrook.info@ametek.com](mailto:drexelbrook.info@ametek.com)

Web: [www.drexelbrook.com](http://www.drexelbrook.com)